LIGHTINGElements

Project Name:	
Type:	
Qty:	

Glow Ring

Pendant

PRODUCT DESCRIPTION

The ring light has a unique ring style light with an LED light source illuminating its full light distribution. It isavailable in sizes ranging from 2ft(dia.) up to 16ft(dia.). The PMMA body constructions keep good illuminating and good heat dispation.

FEATURES

- Available in 10 sizes, can customize size per reqeust.
- Profile size :4″*4″
- Operation Voltage: AC120-277V, 0-10v dimming and non-dimmable for optional
- 360 deg full light emitting
- Efficiency: ≥105lm/w
- 0-10v dimming or non-dimmable
- Dia 2ft/3ft/4ft: central suspension
- Dia 5ft/6ft/8ft/10ft/12ft/14ft/16ft: driect suspension.

ORDERING INFORMATION

GR							

Fixture Type	Mounting	CRI	Color Temp.	Wattage / Size (Diameter)	Dimming	Finish	Options
GLOW RING	**CC** Central Canopy **DS** Direct Suspension **SM** Surface Mount distribution only	**80** 80+ CRI **90** 90+ CRI	**30K** 3000 k **35K** 3500 k **40K** 4000 k	**40W** 23.6″ dia. / 40w / 4200 lm **50W** 35.4″ dia. / 50w / 5250 lm **80W** 47.2″ dia. / 80w / 8400 lm **100W** 59″ dia. / 100w / 10500 lm **120W** 70.9″ / 120w / 12600 lm **160W** 94.5″ / 160w / 16800 lm **200W** 118.1″ / 200w / 21000 lm **240W** 141.7″ / 240w / 25200 lm **300W** 165.4″ / 300w / 31500 lm **400W** 189″ / 400w / 42000 lm	**STD** Standard Non-Dimming **DIM** 0-10v Dimming	**MW** Matte White	**EM15** Emergency Battery Backup (approx. 1050 lm)

LIGHTING Elements

Project Name:	
Type:	
Qty:	

Glow Ring

SUSPENSION OPTIONS

S- SUSPENDED (CENTRAL CANOPY)

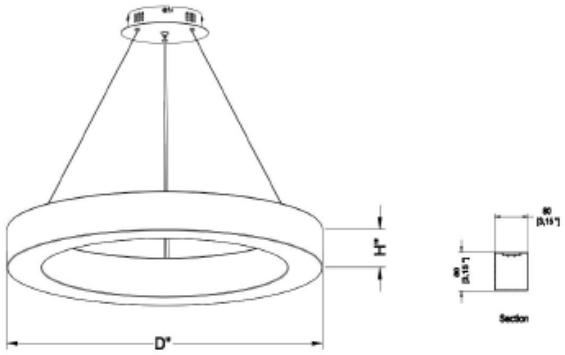

M- MOUNTED (DIRECT SUSPENSION)

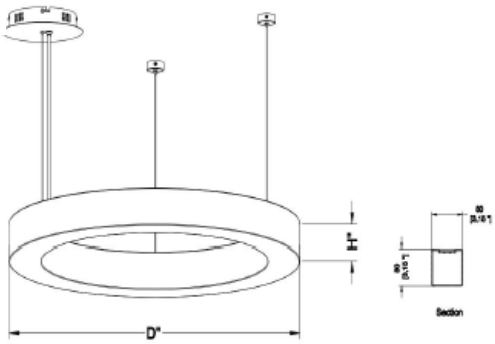

LIGHT DISTRIBUTION

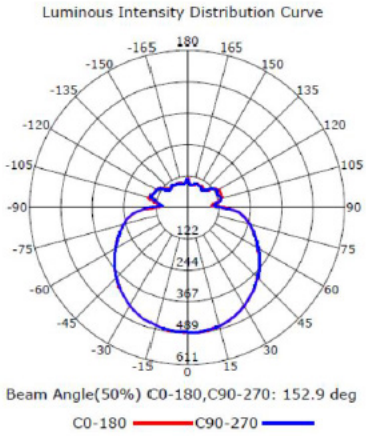
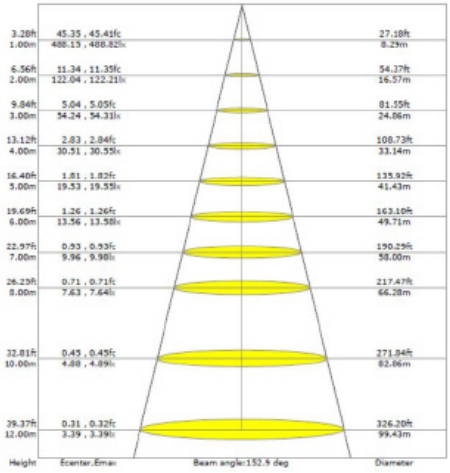
OPTICAL SYSTEM