



Project Name:	
Type:	
Qty:	

Sail POE


Pendant

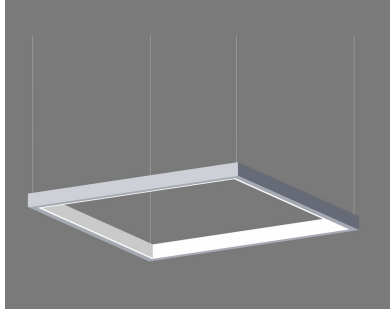


Inner

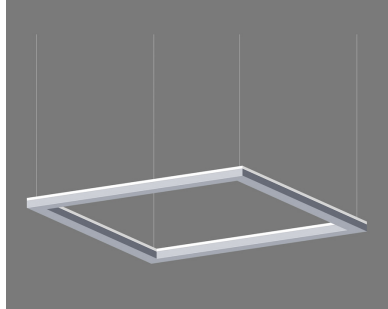

Indirect

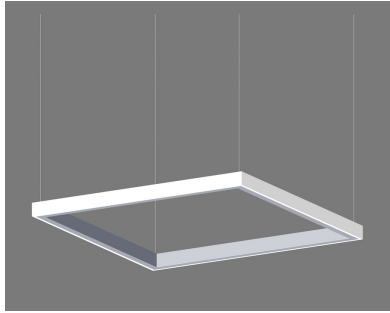

Outer

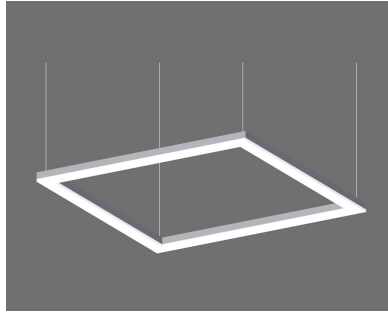

Direct

PRODUCT DESCRIPTION

The Sail pendant light has a unique light distribution with an inner, outer, direct, or indirect LED light source. It is available in 3 sizes ranging from 24"(w) up to 48"(w). The stainless steel body constructions comes with 3 different finish options: white, black, and brushed nickel.

FEATURES

- 3 sizes to choose from
- Stainless steel body construction
- Multiple color finishes to choose from
- 90+ CRI
- 120-277 volt
- 0-10v dimming
- Integral driver in canopy
- Suspension length: 60" (adjustable)
- Damp listed

SPECIFICATIONS

	SM	MD	LG
Length:	23.6"	35.4"	47.2"
Width:	23.6"	35.4"	47.2"
Fixture Height:	0.98"	0.98"	0.98"
Wattage:	40w	60w	80w
Lumens:	4,200lm	6,300lm	8,400lm

ORDERING INFORMATION

SAIL-POE					
Fixture Type	Mounting	Light Distribution	Size (length)	Color Temp.	Finish Color
SAIL-POE Sail Series (power over ethernet)	DS Direct Suspension CC Central Canopy	I Inner O Outer IN Indirect DI Direct	SM Small (23.6") MD Medium (35.4") LG Large (47.2")	30K 3000 k 35K 3500 k 40K 4000 k	BK Black WH White SLV Silver RD Red BL Blue GR Green YL Yellow RAL xxxx Custom RAL

*additional charges may apply for RAL

Project Name:	
Type:	
Qty:	

FINISHES



Silver
(RAL9006)



Yellow
(RAL1021)



Red
(RAL3028)



Gold
(RAL1027)



Black
(RAL7021)



White
(RAL9016)



Green
(RAL6002)



Blue
(RAL5017)